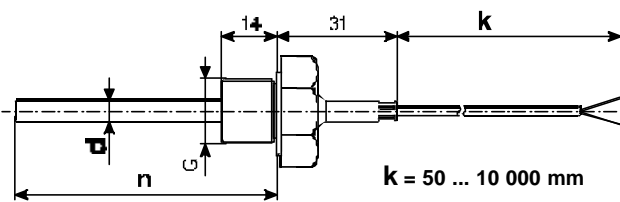
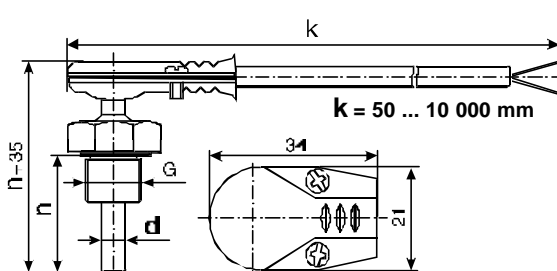
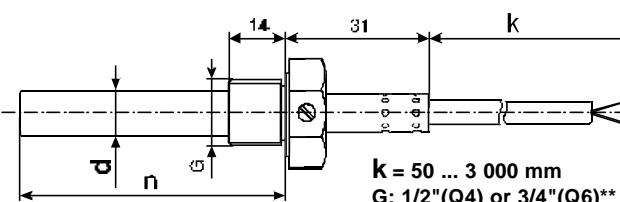
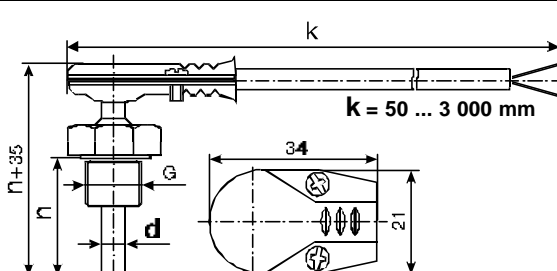


SCREW-IN-TYPE MOISTURE PROOF PROBE EG (TSEG) Sheath - stainless steel 1.4541. Cable - SLSL (silicone insulated)	SENSITIVE ELEMENT	TEMPERATURE RANGE	DIMENSIONS		
			η[mm]	d[mm]	wires
 <p>G: 12x1.5(Q7), 14x1.5(Q8), 16x1.5(Q0), 3/8"(Q3)**</p>	1 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	30...200	5, 6, 8, 9	2, 3, 4*
	2 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	30...200	6, 8, 9	2x2
	1 x Cu (RH, RK)	T9 -50...200 °C	30...200	5, 6, 8, 9	2, 3, 4*
	2 x Cu50 (RH)	T9 -50...200 °C	30...200	6, 8, 9	2x2
	1 x J, 1 x K	T7 0...200 °C	30...200	5, 6, 8, 9	2
	1 x T	T7 0...200 °C	30...200	5, 6, 8, 9	2
* Please, contact COMECO! ** Specify - DIN or NPT					

TS

SCREW-IN-TYPE ANGLED MOISTURE PROOF PROBE EGL (TSEGL) Sheath - stainless steel 1.4541. Cable - SLSL (silicone insulated)	SENSITIVE ELEMENT	TEMPERATURE RANGE	DIMENSIONS		
			η[mm]	d[mm]	wires
 <p>G: 12x1.5(Q7), 14x1.5(Q8), 16x1.5(Q0), 3/8"(Q3)**</p>	1 x Pt (RB,RD,RF,RG)	T9 -50...200 °C T1* -50...400 °C	30...200	5, 6, 8, 9	2, 3, 4*
	2 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	30...200	6, 8, 9	2x2
	1 x Cu (RH, RK)	T9 -50...200 °C	30...200	5, 6, 8, 9	2, 3, 4*
	2 x Cu50 (RH)	T9 -50...200 °C	30...200	6, 8, 9	2x2
	1 x J, 1 x K	T7 0...200 °C T8* 0...400 °C	30...200	5, 6, 8, 9	2
	1 x T	T7 0...200 °C	30...200	5, 6, 8, 9	2
* Please, contact COMECO! ** Specify - DIN or NPT					

SCREW-IN-TYPE MOISTURE PROOF PROBE WITH REPLACEABLE INSERT EGP (TSEGP) Sheath - stainless steel 1.4541. Cable - SLSL (silicone insulated)	SENSITIVE ELEMENT	TEMPERATURE RANGE	DIMENSIONS		
			η[mm]	d[mm]	wires
 <p>G: 1/2"(Q4) or 3/4"(Q6)**</p>	1 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	30...200	8, 9, 10	2, 3, 4*
	2 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	30...200	8, 9, 10	2x2
	1 x Cu (RH, RK)	T9 -50...200 °C	30...200	8, 9, 10	2, 3, 4*
	2 x Cu50 (RH)	T9 -50...200 °C	30...200	8, 9, 10	2x2
* Please, contact COMECO! ** Specify - DIN or NPT					

SCREW-IN-TYPE MOISTURE PROOF PROBE WITH REPLACEABLE INSERT, ANGLED EGLP (TSEGLP) Sheath - stainless steel 1.4541. Cable - SLSL (silicone insulated)	SENSITIVE ELEMENT	TEMPERATURE RANGE	DIMENSIONS		
			d[mm]	η[mm]	wires
 <p>G: 1/2"(Q4) or 3/4"(Q6)**</p>	1 x Pt (RB,RD,RF,RG)	T9 -50...200 °C T1* -50...400 °C	8, 9, 10	30...200	2, 3, 4*
	2 x Pt (RB,RD,RF,RG)	T9 -50...200 °C T1* -50...400 °C	8, 9, 10	30...200	2x2
	1 x Cu (RH, RK)	T9 -50...200 °C	8, 9, 10	30...200	2, 3, 4*
	2 x Cu50 (RH)	T9 -50...200 °C	8, 9, 10	30...200	2x2
	1 x J, 1 x K	T7 0...200 °C T8* 0...400 °C	8, 9, 10	30...200	2
	1 x T	T7 0...200 °C	8, 9, 10	30...200	2
* Please, contact COMECO! ** Specify - DIN or NPT					

COMECO reserves the right of changing specifications without prior notice!